


This mode is for remote use only.

Max. lens height	4.9m 16'0"	Max. length	5.85m 19'0"
Min. lens height undersling	-1.5m -4'9"	Max. height	1.75m 5'8"
Max. camera rise	4.7m 15'4"	Min. width on track	.75/1.17m 2'4"/3'9"
Max. load 2 crew	- -	Min. width on wheels	1.45m 4'8"
Max. load 1 crew	160kg 350lbs	Track width	.62/1m 2'/3'3"
Max. load remote	150kg 330lbs	Weight assembled crane	185kg 400lbs
Reach fulcrum to lens	4.25m 13'10"	Weight loaded crane	1100kg 2420lbs

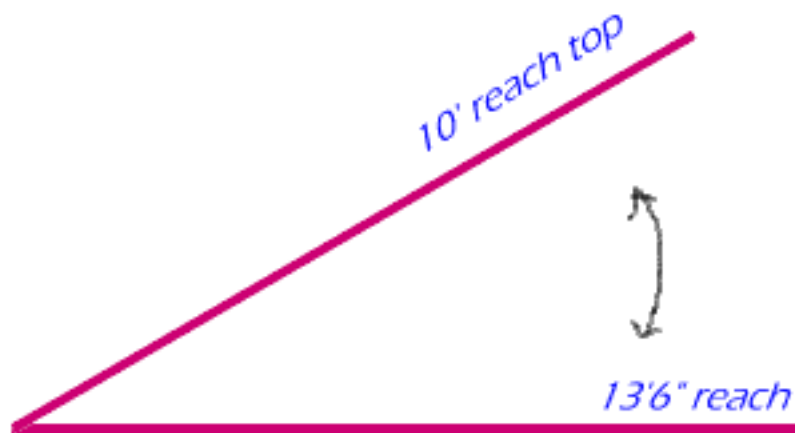

**Mode 1+**

Remote use only

- Height to top of high post = 86"
- Base width wide = 58" tire to tire
- Base width narrow = 25" tire to tire

- Base length = 60" handle to handle
- Reach from weightbox to post = 5'4"
- Counterweights to balance = 4 1/2 weights; 2 seats, small post, 4 way leveling head.
- Top of arc - reach = 10'
- Straight reach = 13'6"

The versatility of the mini crane is further extended by simply adding Boom 4. We recommend using this Mode only with a remote head or with a weaver/steadman or Ronford head. Capacity will be approximately 350 Lbs (160kg.), again, maximum load will be limited when all 36 weights are used on the weight box. In this mode we recommend going with a remote head.